



**DEXTER**  
LAUNDRY

# S-675 SOFTMOUNT EXPRESS PLUS O-SERIES WASHER

DEXTER ON-PREMISE WASHER WITH TOTAL CONTROL.

**ON-PREMISE LAUNDRY**  
**S-675 SOFTMOUNT**  
**EXPRESS PLUS O-SERIES WASHER**



## On-premise laundry solutions you can depend on.

The rugged internal suspension system allows Dexter softmount washers to be installed in locations that can not support a traditional hardmount machine. This flexible design reduces installation time without sacrificing the quality you expect from Dexter Laundry. Our softmount line is made in the USA and backed by an industry-leading 10-year warranty and lifetime technical support.

Our easy to use O-Series controls give you the precision and features you need to ensure your laundry is done properly. They offer 100 fully customizable cycles as well as management tools designed to limit downtime and keep your laundry running efficiently.

When your business depends on clean laundry, choosing the right equipment is an important decision. Our products will provide you with the right management tools and the efficiency, flexibility, performance, and durability you need.

**Contact your Dexter Authorized Distributor today for more details.**

### TOTAL CONTROL



**Dexter O-Series washers give you Total Control over your laundry:**

With a large display, streamlined interface, and multi-lingual capabilities, O-Series Controls are easy to use.

They offer ultimate cycle flexibility and easy programming with DexterLive.

Precise settings for 100 cycles with 20 stages each allow for even the most customized washes and delicate loads, including wet cleaning.

The fully programmable 10-point chemical injection system allows for the right combination of chemicals at just the right time in the bath.

O-Series washers offer a delayed start which saves on labor time by having a load ready when the staff arrives.

The management tools allow you to monitor efficiency giving you more time to focus on your business.

### QUALITY YOU CAN TRUST



#### DURABLE:

Our softmount line combines the same heavy-duty bearing design proven in our hardmount line with an internal spring and damper suspension system. These washers are built to last.

Every machine is designed to withstand our extreme out-of-balance endurance test.

The polished chrome doors and high-quality stainless steel tub, cylinder, top, and front keep washers looking great year after year.

#### RELIABLE:

Our industry leading 10-year warranty covers the seals, bearings, and bearing housing. A 5-year warranty covers the frame, tub, cylinder and shaft while a 3-year parts warranty covers the rest.

We stand behind every machine you invest in with lifetime technical support.

### OPTIONS YOU NEED



#### EFFICIENT:

Powerful Express Plus 400 g-force extraction removes more water to reduce dry time and help save energy.

Our electronic pressure sensor offers a range of water level options to increase efficiency and help save on water. O-Series controls make it easy to set water levels via DexterLive or on the control.

This model offers temperature recording to ensure the cleanliness of each cycle.

#### FLEXIBLE:

The internal suspension system allows our softmount line to fit almost any installation.

O-Series controls give you the precision and features you need to get your laundry done right.

# S-675 SOFTMOUNT EXPRESS PLUS WASHER SPECIFICATIONS

ON-PREMISE LAUNDRY

## Capacity:

Dry Weight Capacity - lb (kg)	40	(18.1)
Cylinder Volume - cu ft (L)	6	(170)

## Speed:

High Extract Speed - g (RPM)	400	(1061)
Motor Size - hp (kW)	3	(2.2)

## Dimensions:

Cabinet Height - in (cm)	52 9/16	(133.5)
Cabinet Width - in (cm)	33	(83.8)
Cabinet Depth - in (cm)	40	(101.6)
Door Opening - in (cm)	15 1/4	(38.7)
Floor to Door Bottom - in (cm)	19 15/16	(50.7)
Cylinder Diameter - in (cm)	25	(63.5)
Cylinder Depth - in (cm)	21 1/8	(53.7)
Static Load Transmitted - lb (kg)	1040	(471.7)
Dynamic Load Transmitted - lb (kg)	368	(166.9)
Dynamic Load Frequency - Hz	17.7	-

## Weight:

Net Weight - lb (kg)	902	(409.1)
----------------------	-----	---------

## Shipping Information:

Shipping Weight - lb (kg)	952	(431.8)
Shipping Height - in (cm)	58 3/4	(149.2)
Shipping Width - in (cm)	34 3/4	(88.3)
Shipping Depth - in (cm)	50	(127)

## Water Requirements:


Water Inlet Size - in (mm)	3/4	(19)
Pressure (min/max) - psi (kPa)	30-120	(207-827)
Flow Rate - gal/min (L/min)	9	(34)
Drain Diameter (O.D.) - in (cm)	3	(7.6)
Floor to Center of Drain - in (cm)	4 1/8	(10.5)

## Electrical Requirements:

Model	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size
-12	208-240 / 60 / 1 / 2 wire + ground	15 / 10 / #12
-12	208-240 / 60 / 3 / 3 wire + ground	15 / 10 / #12
-39	230 / 50 / 1 / 2 wire + ground	15 / 10 / 3.5 mm2

## Installation Recommendations:

Minimum Clearance Between Machines - in (cm)	1/2	(1.3)
Minimum Clearance Behind Machines - in (cm)	24	(61)

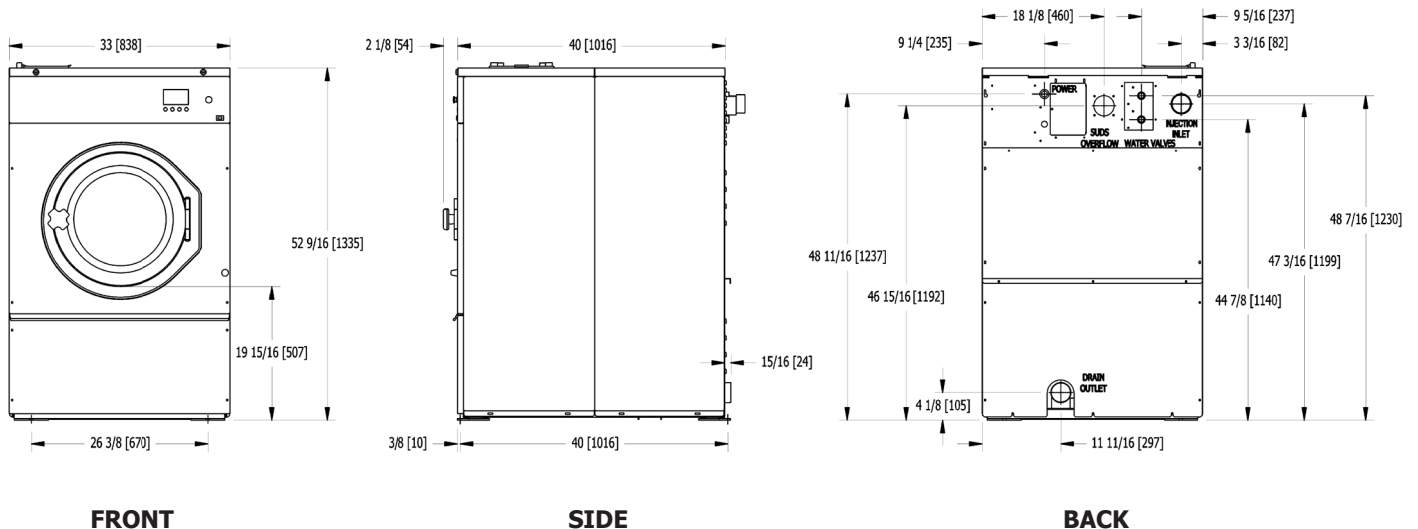

Due to continuous product improvements specifications are subject to change, please consult the installation manual for the most accurate information.  
 \*Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE, and AGA. Dexter Laundry is ISO 9001:2015 certified.